#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau





## (43) International Publication Date 26 May 2005 (26.05.2005)

## **PCT**

# (10) International Publication Number WO 2005/047914 A1

(51) International Patent Classification7: G01R 33/3415

(21) International Application Number:

PCT/IB2004/052265

(22) International Filing Date:

2 November 2004 (02.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 03104161.9


12 November 2003 (12.11.2003)

- (71) Applicant (for DE only): PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]; Steindamm 94, 20099 Hamburg (DE).
- (71) Applicant (for all designated States except DE, US): KONINKLIJKE PHILIPS ELECTRONICS N. V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SCHULZ, Volkmar

[DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). MAZURKEWITZ, Peter [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

- (74) Agents: VOLMER, Georg et al.; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, 7.W.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

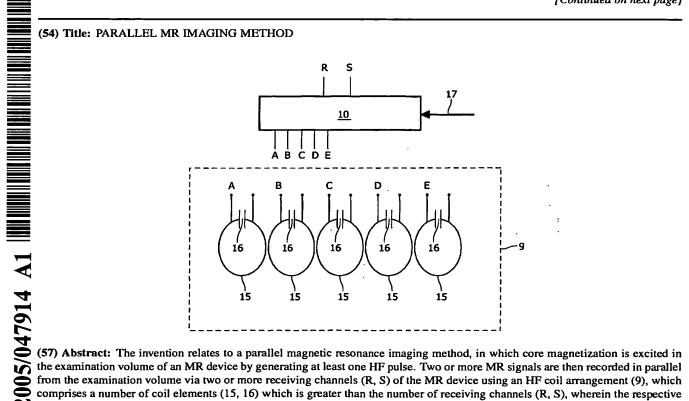

from the examination volume via two or more receiving channels (R, S) of the MR device using an HF coil arrangement (9), which comprises a number of coil elements (15, 16) which is greater than the number of receiving channels (R, S), wherein the respective MR signal on each receiving channel (R, S) is formed by weighted superimposition of coil signals (A, B, C, D, E) of the individual coil elements (15, 16). Finally, according to the invention, an MR image is reconstructed from the recorded MR signals, the MR signals being combined with one another taking into account effective spatial sensitivity profiles associated with the individual receiving channels (R, S).





ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

#### Published:

- with international search report